



Impulse XT is a single gas detector with two-year, always-on operation, durable IP67 casing and Real Time display option

Impulse XT



Cost Effective

- No calibration required
- Unit may be calibrated if site procedures necessitate
- Remaining lifetime display enables planned replacement
- 24 month continuous operation
- Low cost investment

Easy to Use

- Out-of-the-box solution
- One button operation
- Optional Interactive Training Guide available

Excellent EMC/RFI performance

- No false alarms due to walkie-talkies or mobile phones
- Exceeds with toughest industrial standards for RFI immunity and EMC compatibility

Reliable Operation

- Uses patented SureCell™ (CO and H₂S only) and Reflex™* technology
- Stable and accurate gas readings
- Intrinsically safe

Compact Design

- Small ergonomic design
- Lightweight
- Comfortable to wear

Durable housing

- Rugged and impact resistant
- Weather resistant
- Dust & Waterproof to IP67

Versatile clip design

- Comes with crocodile clip – clips anywhere, prevents accidental loss

Large Display

Uses distinctive icons to illustrate:

- Battery life status
- Actual gas reading during alarm - or Real Time Display option
- Peak reading and when it occurred
- Remaining lifetime
- Alarm status
- Test status

Demanding Alarms

- Distinctive two-tone alarm
- Rapid flashing alarm alerts user of danger
- Vibrating alarm signals alarm in progress
- Low battery alarm – indicates unit nearing end of life

Impulse XT was inspired by customer needs and technically crafted to be quite simply the easiest and most cost effective to use personal single gas unit on the market. Utilising patented Surecell™ and Reflex™ technology, the Impulse XT provides 24/7 user confidence. That means solid, reliable and continuous protection... always.



Through our Customer Partner Program, Honeywell Analytics identified that the market demanded more than tiny good looks. Our valued partners said that in addition to a small and rugged design, single gas monitors must offer comprehensive sensor options, simple operation and most importantly reliable, accurate readings – without false alarms triggered by common radio interference.

Simple one button operation reduces time consuming and costly training. Our unique Temperature Compensation and Cell Output Decay Compensation features ensure improved accuracy across wide temperature ranges, providing our 2 year, no calibration needed facility.

Impulse XT is your out-of-the-box solution to simple, "XTra Sensory Detection."

General Specification




Standard Specification					
General	Disposable single gas monitor for the protection of personnel against toxic and Oxygen gas hazards				
Maximum operating life	2 years after activation				
Shelf life	12 months before activation (CO and H ₂ S), 6 months before activation (O ₂)				
Sensor range	Carbon Monoxide CO	0-1000ppm (display: 0-200ppm)			
	Hydrogen Sulphide H ₂ S	0-100ppm (display: 0-100ppm)			
	Oxygen O ₂	0-30.0% v/v (display: 0-25.0%v/v)			
Alarm set points	CO	Level 1	35ppm	Level 2	100ppm
	H ₂ S	Level 1	10ppm	Level 2	15ppm
	O ₂	Level 1	23.5%	Level 2	19.5%
Calibration	CO/H ₂ S	Zero adjustment (optional Span)			
	O ₂	Span adjustment			
Operating temperature	-20°C to +50°C (-4°F to 122°F)				
Humidity	5-95% RH (non-condensing)				
Audible alarm	95db at 10cm (4in)				
Visual alarm	High intensity red LEDs				
Vibrating alarm	Supplied as standard				
Display	Custom LCD				
Sensor type	Electrochemical				
Battery	3.6V non-replaceable Lithium battery				
IP rating	IP67 (NEMA 4 & 6)				
Intrinsic safety	Europe: EEx ia IIB T4 (CENELEC), II 2G EEx ia IIC T4 (ATEX) North America: Class 1, Div 1, Groups A, B, C, D T4 (UL/cUL)				
RFI/EMC	CE EN50270:1999 and EN55011				
Dimensions	87mm x 50mm x 27mm (3.4"(H) x 2"(W) x 1.1"(D))				
Weight	CO/H ₂ S	73g (2.57oz)			
	O ₂	82.3g (2.90oz)			

*Reflex™ not available for all sensors

*Oxygen detection products must only be used to detect oxygen depletion in air

Display Details

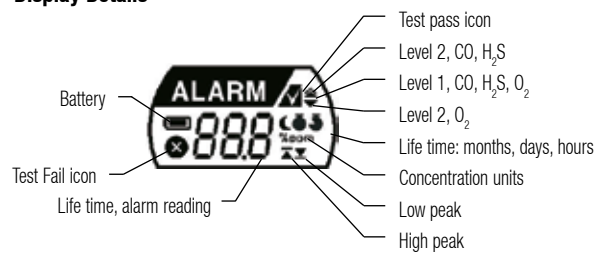

Honeywell Analytics Gas Detection



Honeywell Analytics is able to provide gas detection solutions to meet the requirements of all applications and industries. Contact us in the following ways:

Headquarters

Europe, Middle East, Africa

Life Safety Distribution AG

Javastrasse 2

8604 Hegnau

Switzerland

Tel: +41 (0)44 943 4300

Fax: +41 (0)44 943 4398

gasdetection@honeywell.com

Customer Service:

Tel: 00800 333 222 44 (Freephone number)

Tel: +41 44 943 4380 (Alternative number)

Fax: 00800 333 222 55

Middle East Tel: +971 4 450 5800 (Fixed Gas Detection)

Middle East Tel: +971 4 450 5852 (Portable Gas Detection)

Americas

Honeywell Analytics Distribution Inc.

405 Barclay Blvd.

Lincolnshire, IL 60069

USA

Tel: +1 847 955 8200

Toll free: +1 800 538 0363

Fax: +1 847 955 8210

detectgas@honeywell.com

Asia Pacific

Honeywell Analytics

Asia Pacific

#701 Kolon Science Valley (1)

43 Digital-Ro 34-Gil, Guro-Gu

Seoul 152-729

Korea

Tel: +82 (0) 2 6909 0300

Fax: +82 (0) 2 2025 0388

India Tel: +91 124 4752700

analytics.ap@honeywell.com

Technical Support Centres

Honeywell Analytics Ltd.

4 Stinsford Road

Nuffield Industrial Estate

Poole, Dorset, BH17 0RZ

United Kingdom

Tel: +44 (0) 1202 645 544

Fax: +44 (0) 1202 645 555

Honeywell Analytics

ZAC Athélia 4 - 375 avenue du Mistral

Bât B, Espace Mistral

13600 La Ciotat

France

Tel: +33 (0) 4 42 98 17 75

Fax: +33 (0) 4 42 71 97 05

Honeywell Analytics

Elsenheimerstrasse 43

80687 München

Germany

Tel: +49 89 791 92 20

Fax: +49 89 791 92 43

Honeywell Analytics

P.O. Box-45595

6th Street

Musaffah Industrial Area

Abu Dhabi

UAE

Tel: +971 2 554 6672

Fax: +971 2 554 6672

EMEA: HAexpert@honeywell.com

US: ha.us.service@honeywell.com

AP: ha.ap.service@honeywell.com

www.honeywellanalytics.com

www.raesystems.com

Honeywell Analytics
Experts in Gas Detection

BWF
Technologies
by Honeywell

RAE
SYSTEMS
by Honeywell

Please Note:

While every effort has been made to ensure accuracy in this publication, no responsibility can be accepted for errors or omissions. Data may change, as well as legislation, and you are strongly advised to obtain copies of the most recently issued regulations, standards, and guidelines. This publication is not intended to form the basis of a contract.

10718_H_Impulse XT_DS0300_V9_EMEA

06/12

© 2012 Honeywell Analytics

Honeywell