


Correlative Gas Quality Measuring Device EMC 500



PRODUCT INFORMATION

**Serving the Gas Industry
Worldwide**

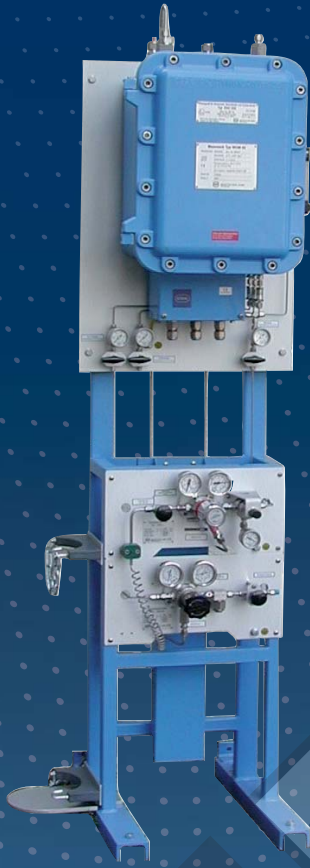

CORRELATIVE GAS QUALITY MEASURING DEVICE EMC 500

Fields of application, features

Fields of application

The measuring element of the EMC 500 continuously determines the **superior and inferior calorific values, standard density and Wobbe index** of natural gas. The EMC 500 as a calorific value measuring device is particularly suitable for local gas systems with minor variations in the superior calorific value, and in measuring stations with lower flow rates, e.g. at individual industrial gas consumers. Apart from measurements for billing purposes, the device can also be used in applications where two gases are mixed, binary mixtures are analyzed or gas burners are controlled by means of the Wobbe index.


The EMC 500 is a low-cost alternative to the process gas chromatograph and provides the necessary quantities for the determination of the energy content and K coefficient of natural gas. The carbon dioxide content required for the calculation of the K coefficient is also measured.

The measuring device EMC 500 has been approved for custody transfer measurement of the superior calorific value, standard density and carbon dioxide content for gases of the second gas family (natural gases), described in the DVGW guideline G 260.

With the variant **EMC 500-L** also gas with an admixture of up to 20% of air can be measured. In this case superior calorific value and CO₂ content may be used for fiscal metering.

Features

- **Combustion-free measuring method:** No undesired heat is produced and no air must be supplied.
- **No influence of the environment:** Atmospheric pressure and ambient temperature variations do not affect measurements. No air conditioning is required at the place of installation.
- **Low on maintenance.**
- **No carrier or auxiliary gas required.**
- **Simple and straightforward operation.**
- **Short response times.**
- **Automatic recalibration.**
- **Low operating costs.**
- **Ex and Non Ex designs.**
- **Calibration with methane.**
- **Air admixture up to 20% is possible with the version EMC 500-L**
- **Test gas inlet**
- **Calculation of the methane number (option)**

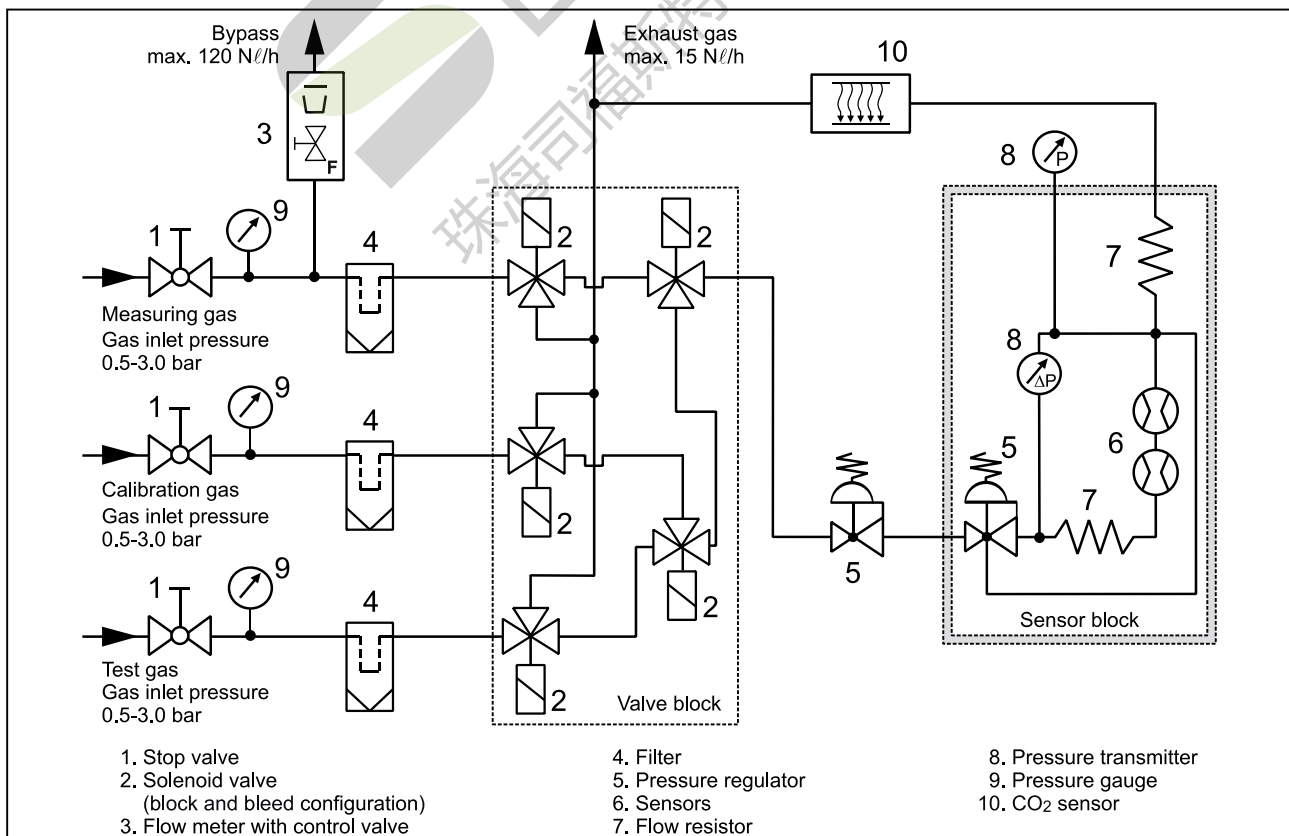

Construction

The EMC 500 calorific value measuring device consists of the WOM 02 C measuring element with the thermal sensors and pressure regulators, and the analytical computer. The measuring element is fixed to a mounting plate and is available either as Non-Ex design or Ex design with an explosion-proof enclosure. The analytical computer is installed in a control cabinet in the electrical control room.

Temperature control and thermal insulation of the measuring element prevent the ambient temperature affecting the measuring performance. Solenoid valves are used to switch between the measuring gas and the calibration gas from a permanently connected gas cylinder, calibration cycles are performed automatically.

Part of the measuring gas can be discharged through a bypass without passing the measuring element. This increases

the flow in the supply pipe, and all the time current measuring gas is measured.

Method of operation

At the heart of the EMC 500 lie two thermal sensors depending on the type of gas which are used to measure the heat capacity, thermal conductivity and viscosity of the gas. Since these quantities represent a function of the superior calorific value over a wide range, it is possible to calculate the superior and inferior calorific values from these measured values (correlative method of measurement). The standard density is determined using the pressure drop measured by a flow resistor, the carbon dioxide content of the gas is measured by an infrared sensor.

Specifications																									
Accuracy for natural gas ¹⁾ :	≤ 0.5% of the measured value (H_s and ρ_n)																								
Measuring ranges:	<table border="1"> <thead> <tr> <th></th> <th>Secondary metering</th> <th>Fiscal metering</th> </tr> <tr> <th></th> <th>natural gas / other fuel gases</th> <th>natural gas</th> </tr> </thead> <tbody> <tr> <td>standard density ρ_n</td> <td>0.65 - 1.3 / 0.3 - 2 kg/Nm³</td> <td>0.71 - 0.97 kg/Nm³</td> </tr> <tr> <td>superior calorific value H_s</td> <td>7 - 14 / 2 - 25 kWh/Nm³</td> <td>8.4 - 13.1 kWh/Nm³</td> </tr> <tr> <td>carbon dioxide content CO_2</td> <td>0 - 20 / 0 - 20 mol%</td> <td>0 - 5 or 0 - 20 mol%</td> </tr> <tr> <td>Wobbe index W_s</td> <td>8 - 16 / 3 - 25 kWh/Nm³</td> <td></td> </tr> <tr> <td>inferior calorific value H_i</td> <td>7 - 14 / 2 - 25 kWh/Nm³</td> <td></td> </tr> <tr> <td>methane number (option) MN</td> <td>40 - 100 ± 2 / —</td> <td></td> </tr> </tbody> </table>		Secondary metering	Fiscal metering		natural gas / other fuel gases	natural gas	standard density ρ_n	0.65 - 1.3 / 0.3 - 2 kg/Nm ³	0.71 - 0.97 kg/Nm ³	superior calorific value H_s	7 - 14 / 2 - 25 kWh/Nm ³	8.4 - 13.1 kWh/Nm ³	carbon dioxide content CO_2	0 - 20 / 0 - 20 mol%	0 - 5 or 0 - 20 mol%	Wobbe index W_s	8 - 16 / 3 - 25 kWh/Nm ³		inferior calorific value H_i	7 - 14 / 2 - 25 kWh/Nm ³		methane number (option) MN	40 - 100 ± 2 / —	
	Secondary metering	Fiscal metering																							
	natural gas / other fuel gases	natural gas																							
standard density ρ_n	0.65 - 1.3 / 0.3 - 2 kg/Nm ³	0.71 - 0.97 kg/Nm ³																							
superior calorific value H_s	7 - 14 / 2 - 25 kWh/Nm ³	8.4 - 13.1 kWh/Nm ³																							
carbon dioxide content CO_2	0 - 20 / 0 - 20 mol%	0 - 5 or 0 - 20 mol%																							
Wobbe index W_s	8 - 16 / 3 - 25 kWh/Nm ³																								
inferior calorific value H_i	7 - 14 / 2 - 25 kWh/Nm ³																								
methane number (option) MN	40 - 100 ± 2 / —																								
Gas consumption:	max. 15 NI/h																								
Inlet pressure range:	0.5 - 3.0 bar																								
Ambient temperature range:	-20°C - +55°C																								
Degree of protection:	Ex design: IP 54 Non-Ex design: IP 43																								
Ex device protection type:	II 2G EEx de IIB T4 Appr. no.: DMT 02 ATEX E 035																								
Response times ²⁾ :	T 50: ≤ 30 s T 90: ≤ 60 s																								
Calibration time:	8 min																								
Current outputs:	up to 4 outputs, electrically isolated, 0/4 - 20 mA freely programmable, maximum load 700 Ω																								
Relay contacts:	Changeover contacts, $U_{max} = 24$ V, $P_{max} = 100$ mW Fault relay (alarm), "Calibration running" relay																								
Ports:	2x RS 232 C/ V24																								
Power supply:	230/ 115 V AC or 24 V DC																								
Power requirement:	Measuring element: approx. 40 W (in the start-up phase 100 W) Analytical computer: 35 W																								
Measuring gas connection:	Standard 1/8" Swagelok (option: 4 mm Swagelok)																								
Outlet pipe connection:	Standard 6 mm Swagelok																								
Dimensions (wall mounting plate):	W x H = 504 x 650 mm D = 340 mm (Ex) or 290 mm (Non-Ex)																								
Weight (basic device):	Ex design: approx. 50 kg Non-Ex design: approx. 35 kg																								
Safety features:	Pressure / temperature monitoring (alarm)																								

¹⁾ Accuracy for other fuel gases on request

²⁾ Indicates the time after which the analytical result has followed a previous change in the gas composition by 50% (T50) or 90% (T90).

For More Information

To learn more about RMG's advanced gas solutions, contact your RMG account manager or visit www.rmg.com

GERMANY

Honeywell Process Solutions

RMG Regel + Messtechnik GmbH
Osterholzstrasse 45
34123 Kassel, Germany
Tel: +49 (0)561 5007-0
Fax: +49 (0)561 5007-107

Honeywell Process Solutions

RMG Messtechnik GmbH
Otto-Hahn-Strasse 5
35510 Butzbach, Germany
Tel: +49 (0)6033 897-0
Fax: +49 (0)6033 897-130

Honeywell Process Solutions

RMG Gaselan Regel + Messtechnik GmbH
Julius-Pintsch-Ring 3
15517 Fürstenwalde, Germany
Tel: +49 (0)3361 356-60
Fax: +49 (0)3361 356-836

Honeywell Process Solutions

WÄGA Wärme-Gastechnik GmbH
Osterholzstrasse 45
34123 Kassel, Germany
Tel: +49 (0)561 5007-0
Fax: +49 (0)561 5007-207

ENGLAND

Honeywell Process Solutions

Bryan Donkin RMG Gas Controls Ltd.
Enterprise Drive, Holmewood
Chesterfield S42 5UZ, England
Tel: +44 (0)1246 501-501
Fax: +44 (0)1246 501-500

CANADA

Honeywell Process Solutions

Bryan Donkin RMG Canada Ltd.
50 Clarke Street South, Woodstock
Ontario N4S 0A8, Canada
Tel: +1 (0)519 5398531
Fax: +1 (0)519 5373339

USA

Honeywell Process Solutions

Mercury Instruments LLC
3940 Virginia Avenue
Cincinnati, Ohio 45227, USA
Tel: +1 (0)513 272-1111
Fax: +1 (0)513 272-0211

TURKEY

Honeywell Process Solutions

RMG GAZ KONT. SIS. ITH. IHR. LTD. STI.
Birlik Sanayi Sitesi, 6.
Cd. 62. Sokak No: 7-8-9-10
TR - Sasmaz / Ankara, Turkey
Tel: +90 (0)312 27810-80
Fax: +90 (0)312 27828-23

