

DATA LOGGER

PRILOG 400

Data logger with flexible archive structure. The device provides all functionalities and has all relevant approvals which a data logger for gas metering stations must have. This includes interfaces and a built-in modem.



METHOD OF OPERATION AND CONSTRUCTION

Efficient through Experience, reliable in performance

Experience makes RMG one of the leading providers of natural gas measurement equipment. This is also shown with Prilog 400 - a reliable solution for data logging. With its competitive price and low overall operating cost the device is perfectly tailored to meet the demands of the natural gas industry: Trust in reliability and precision.

Application

The Prilog 400 data logger is a compact and robust device specifically developed for the natural gas market and for industrial usage. It allows gas network operators and their customers to store a wide range of meter readings, measured values and events as well as to read out all these data via standard communication protocols.


As a completely modular solution, the Prilog 400 is a (soon available) MessEG-approved data logger which can be used as a stand-alone system or mounted onto a gas meter. In addition, the Prilog 400 allows remote reading via GSM / GPRS / LTE connection by a integrated modular modem. Parallel to the technical functionalities the data logger offers a very competitive price and a low operating cost.

Operation

The configuration data, archive entries, measured and calculated values as well as the messages in case of events can be read on the LCD display panel. The navigation in the data using the 6 button keyboard is menu-driven and is largely possible without the help of the manual. Parameter changes are also possible via the control buttons.

The operation is even easier and much more comfortable with the included readout, parameterization and visualization program RMGView^{Prime}. The program can be used both locally and in the control center.

This intuitive Windows®-based software for data processing, graphical visualization, device settings and data export enables an easy commissioning and installation of the device.

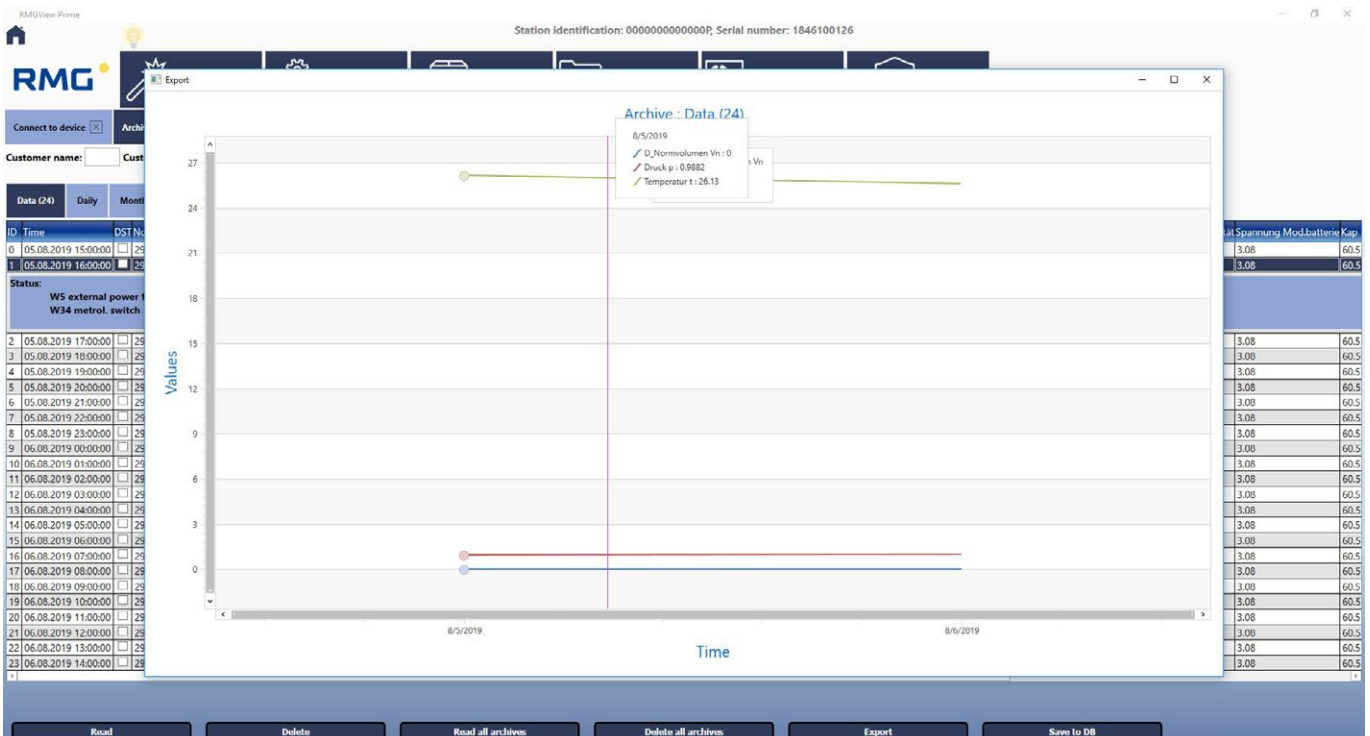

FEATURES AND TECHNICAL DATA

Technical Data										
Dimensions	263 x 201 x 111 mm									
Housing	Glass fiber polycarbonate									
Weight	2.2 kg									
Protection class	IP66									
Display	Graphic LCD display with backlight, 128 x 64 pixels									
Ambient temperature	-25°C to +70°C									
Software solutions	RMGView ^{Prime} for parameterization of Prilog 400 WICO 22 for remote reading Drivers: GAS-X, Görlitz (Fröschl, Kisters in preparation) Support of other software producers on request									
Supply options	<table border="0"> <tr> <td>Zone 0:</td> <td>Zone 1:</td> <td>Zone 2:</td> </tr> <tr> <td>- CPU:</td> <td>Battery, 5 V</td> <td>Battery, 5 V, 24 V, 230 V</td> </tr> <tr> <td>- Modem:</td> <td>Battery</td> <td>Battery, 5 V, 24 V, 230 V</td> </tr> </table>	Zone 0:	Zone 1:	Zone 2:	- CPU:	Battery, 5 V	Battery, 5 V, 24 V, 230 V	- Modem:	Battery	Battery, 5 V, 24 V, 230 V
Zone 0:	Zone 1:	Zone 2:								
- CPU:	Battery, 5 V	Battery, 5 V, 24 V, 230 V								
- Modem:	Battery	Battery, 5 V, 24 V, 230 V								
Supply modules	<p>Standard: module for basic device with lithium battery - up to 15 years lifetime With built-in modem with additional battery module (not with 24 / 230 V supply)</p> <p>External supply (optional): Zone 2: 230 V or 24 V (module integrated) Zone 0 & 1: 12 V (with external PS-E module, In: 12 V, Out: 5 V)</p>									
Inputs	<p>8 digital inputs:</p> <ul style="list-style-type: none"> - 2x HF / encoder - 6x LF / binary <p>Up to 6 analog inputs (optional)</p>									
Outputs	<p>Up to 4 digital outputs (LF or binary) Up to 4 analog outputs (optional)</p>									
Encoder	Namur SCR+									
Interfaces	<p>1 optical interface: 9.6 - 38.4 KBit/s 2x RS-232 / RS-485: 9.6 - 57.6 KBit/s Internal Modem</p>									
Modem	GSM/GPRS LTE Cat1									
ATEX approval	Ready for use in Zone 0, 1 and 2									
Storage depth	Number of entries:									
- Periodical archive	112000									
- Daily archive	5000									
- Monthly archive	1900									
- Binary archive	9360									
- Event archive	6300									
- Gas quality archive	2340									
- Parameter change logbook	1000									
	Period adjustable from 1s to 1h (standard)									



RMG Messtechnik GmbH

Otto-Hahn-Straße 5

35510 Butzbach, Deutschland

Tel: +49 (0) 6033 897 – 0

Fax: +49 (0) 6033 897 – 130

RMG 中国地区代理商



<https://www.safedtech.com>

4001642016

联系人: 刘 先生 18688194199